PC781

3-Liter Mini-ITX Chassis

Features & Benefits

- Petite size for space saving
- Easy & cost-effective:Compatible with standard components
- Environment friendly:Low noise solution
- Energy saving : High efficiency power consumption
- Optional LCD VESA mounting kit for all-in-one PC alternative
- Optional cable guide cover with Kensington lock for security

Specification

PC781

Model Name	• PC78131				
M/B Form Factor	• Mini-ITX (6.7" x 6.7")				
Dimension (DxWxH)	• 230 mm x 75 mm x 220 mm • 9.1" x 3" x 5.7" (Bezel not included)				
Drive Bay	• Internal : 2.5" x 1 or 2 • Slim ODD : 1 or 0 • Card Reader : 1 (SD/Mini-SD/MMC/MS) (Optional)				
PSU	• Form Factor : External adapter • Watts : 60 W				
Indicator	• 1 x Power Status LED, 1 x HDD Activity LED				
Front Control	• Power ON/OFF, 2 x USB 2.0 Ports, 2 x Audio, 1 x IEEE1394 (Optional)				
Security	• Intrusion Switch, Kensington Lock Supported, Padlock Loop				
Cooling Fan	• Top : 1 x 60 mm (Optional) • Rear : 1 x 40 mm (Optional) (Atom version : No system fan)				
Slot Opening	• 0				
Material	• SECC				
Plastic Material Type	• ABS-HB				
Sheet Metal Thickness	• 0.6 mm				
Net Weight	• 1.38				
Gross Weight	• 2.18				
Front Bezel	• Optional				
Container Info		20'	40'	40'H	
	• Single Packing	1328	2728	X	
	• Bulk Packing + Pallet	3360	7280	X	

Feature

PC781

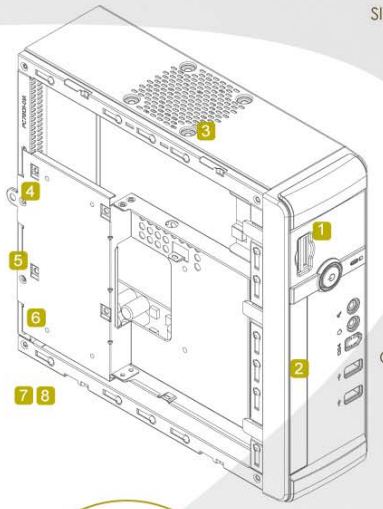

1 Optional card reader : SD/Mini-SD/MMC/MS

2 Slim ODD

3 Optional 1 x top 60 mm fan for Atom CPU

4 Bracket for 1 or 2 x internal 2.5" bays

5 Optional 1 x rear 40 mm fan for Atom CPU

6 Adapter

7 Optional LCD VESA mounting kit

8 Optional cable guide cover